

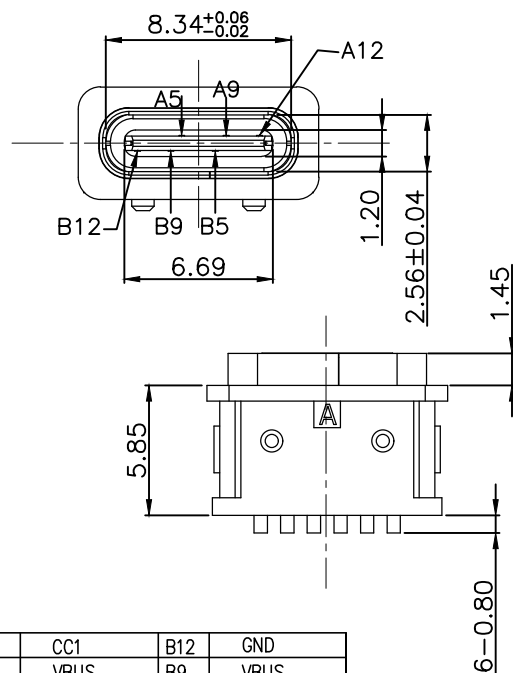
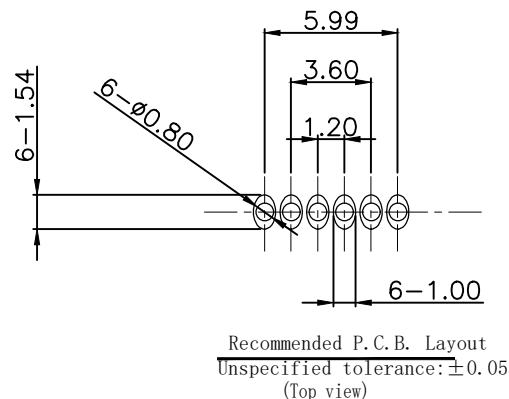


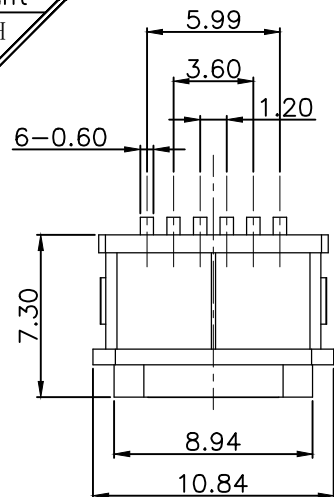


A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2
PIN	SIGNAL NAME	PIN	SIGNAL NAME

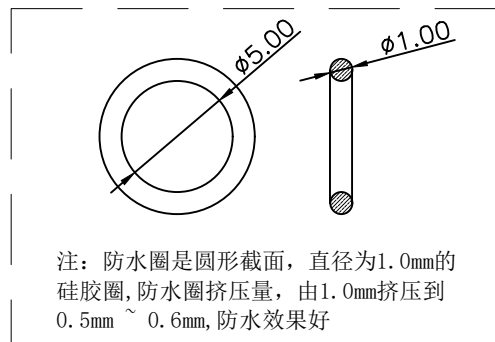

SPECIFICATION:

1. CURRENT RATING: 3.0A MAX
2. DIELECTRIC WITHSTAND VOLTAGE: 100VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY:10,000 CYCLES
9. WATER PROOFNESS:THIS PRODUCT IS BASED ON IPX7.

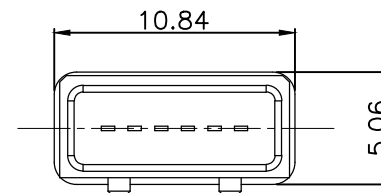

4	Shell1	1	SUS301 Ni Plating T=0.25mm	Ni:40u"Min;
3	Housing2	1	PA10T(G.F30%)	
2	Contact	5	Phosphor bronze C5210R-EH Au/Ni Plating T=0.20mm	Ni:40u"Min; Au:CONTACT AREA:1u", OTHER AREA:G/F
1	Housing	1	PA10T (G.F30%)	
ITEM	PART NAME	Q' TY	FINISH	NOTE

CUSTOMER DRAWING			铭创科技（东莞）有限公司		
UNITS mm		SCALE 1:1	Mingchuang Technology (Dongguan) Co., Ltd.		
PROJECTION: 		SHEET 1 OF 1	TITLE 防水TYPE C母座6PIN 立式插板DIP L=7.3 无外壳脚 全塑		
GENERAL TOLERANCE 0. ±0.50 0.0 ±0.20 0.00 ±0.10 0.° ±1° 0.0° ±0.5°		DRAW: DAP	MAT'L SEE TABLE		
		CHECK: HWT	FINISH SEE TABLE		
		APPD: HHM	DWG. NO. B09W0606A	PART NO. _____	SIZE A4