
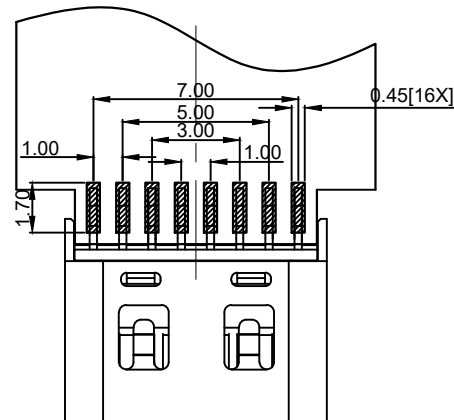
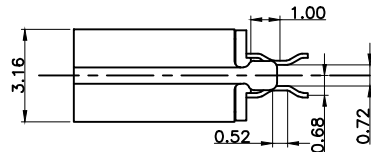
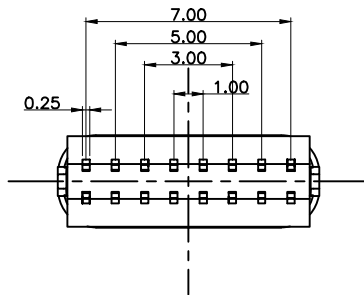

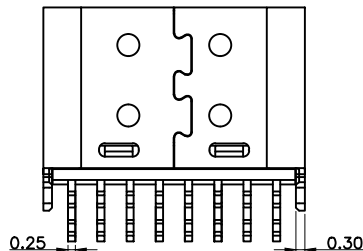
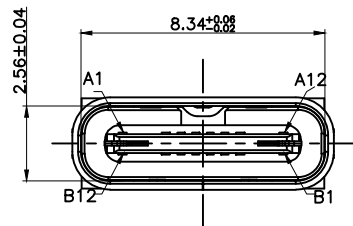


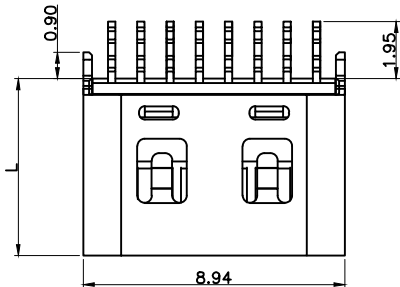

RECOMMENDED P.C.B. LAYOUT
T=0.8 ±0.05mm

L=7.40

REV

A

DESCRIPTION

新板发行

DATE

2023.05.05

APPROVED

HHM

NOTE:

备注:

1.MATERIAL SPECIFICATION:

1.材料规格:

1-1.HOUSING:HIGH TEMPERATURE RESISTANT PLASTIC,UL94 V-0.

1-1.胶芯材料: 高温塑胶, 防火等级UL94 V-0

1-2.TERMINAL: COPPER ALLOY

1-2.端子材料: 铜合金

1-3.FRONT SHELL: STAINLESS STEEL

1-3.外壳材料: 不锈钢

1-4.MID PLATE: STAINLESS STEEL

1-4.中夹片: 不锈钢

2.PLATING SPECIFICATION:

2.电镀规格:

2-1.TERMINAL:

2-1.端子:

Ni 30u" MIN. UNDER PLATED OVER ALL.

镀镍底 30u" MIN.

Au PLATED Golden Flash OVER Ni

表面刷金 Golden Flash

2-2.FRONT SHELL:

2-2.外壳:

Ni 30u" MIN. PLATED OVER ALL.

镀镍底 30u" MIN.

3.MECHANICAL PERFORMANCE,

3.机械性能:

3-1.INSERTION FORCE: 0.5~2.0kgf.

3-1.插入力: 0.5~2.0kgf.

3-2.REMOVAL FORCE: 0.6kgf~2.0kgf.

3-2.拔出力: 0.6kgf~2.0kgf.

3-3.DURABILITY: 10000 CYCLES.

3-3.插拔寿命: 10000次.

4.ELECTRICAL PERFORMANCE,

4.电气性能:

4-1. VOLTAGE RATING: 48V DC/AC

4-1. 额定电压: 48V DC/AC

CURRENT RATING: 5A

额定电流: 5.0A

4-2. LLCR: 50mΩ/PIN MAX.

4-2. 接触阻抗: 50mΩ/PIN MAX.

4-3.INSULATION RESISTANCE: 100MΩ MIN

4-3. 绝缘阻抗: 100MΩ MIN

4-4.DIELECTRIC WITHSTAND VOLTAGE,AC 100V FOR 1 MINUTE.



4-4. 耐电压: AC 100V FOR 1 MINUTE.

5. ENVIRONMENTAL PERFORMANCE:

5. 环境特性:

OPERATING TEMPERATURE: -25°C~+85°C.

工作温度: -25°C~+85°C.



CUSTOMER DRAWING

UNITS	SCALE	SHEET
mm	1:1	1 OF 1
PROJECTION:	DRAW:	
	DAP	
GENERAL TOLERANCE	CHECK:	
.000 ±0.02	HWT	
.00 ±0.10		
.0 ±0.20		
.0 ±2°		
.00 ±1°	HHM	

铭创科技(东莞)有限公司

Mingchuang Technology (Dongguan) Co., Ltd

TITLE

TYPE C母座16PIN 夹板0.8 L=6.5 有脚 三模 有弹

MAT'L

SEE TABLE

FINISH

SEE TABLE

DWG. NO.

A011619A

PART NO.

SIZE

A4