



REV	DESCRIPTION	DATE	APPROVED
A	新板发行	2023.05.05	HHM

NOTE:

备注:

1.MATERIAL SPECIFICATION:

1.材料规格:

1-1.HOUSING:HIGH TEMPERATURE RESISTANT PLASTIC,UL94 V-0.

1-1.胶芯材料: 高温塑胶, 防火等级UL94 V-0

1-2.TERMINAL: COPPER ALLOY

1-2.端子材料: 铜合金

1-3.FRONT SHELL: STAINLESS STEEL

1-3.外壳材料: 不锈钢

1-4.MID PLATE: STAINLESS STEEL

1-4.中夹片: 不锈钢

2.PLATING SPECIFICATION:

2.电镀规格:

2-1.TERMINAL:

2-1.端子:

Ni 30u" MIN. UNDER PLATED OVER ALL.

镀镍底 30u" MIN.

Au PLATED Golden Flash OVER Ni

表面刷金 Golden Flash

2-2.FRONT SHELL:

2-2.外壳:

Ni 30u" MIN. PLATED OVER ALL.

镀镍底 30u" MIN.

3.MECHANICAL PERFORMANCE,

3.机械性能,

3-1.INSERTION FORCE: 0.5~2.0kgf.

3-1.插入力: 0.5~2.0kgf.

3-2.REMOVAL FORCE: 0.6kgf~2.0kgf.

3-2.拔出力: 0.6kgf~2.0kgf.

3-3.DURABILITY: 10000 CYCLES.

3-3.插拔寿命: 10000次.

4.ELECTRICAL PERFORMANCE,

4.电气性能,

4-1. VOLTAGE RATING: 48V DC/AC

4-1.额定电压: 48V DC/AC

CURRENT RATING: 5A

额定电流: 5.0A

4-2. LLCR: 50mΩ/PIN MAX.

4-2.接触阻抗: 50mΩ/PIN MAX.

4-3.INSULATION RESISTANCE: 100MΩ MIN

4-3.绝缘阻抗: 100MΩ MIN

4-4.DIELECTRIC WITHSTAND VOLTAGE,AC 100V FOR 1 MINUTE.


4-4.耐电压: AC 100V FOR 1 MINUTE.

5. ENVIRONMENTAL PERFORMANCE:








5.环境特性:

OPERATING TEMPERATURE: -25°C~+85°C.



工作温度: -25°C~+85°C.



不带防水圈

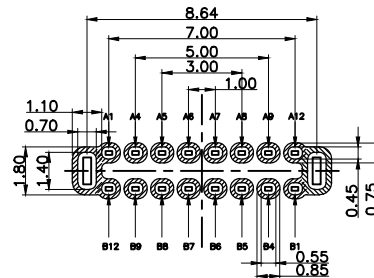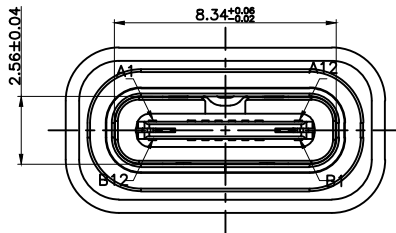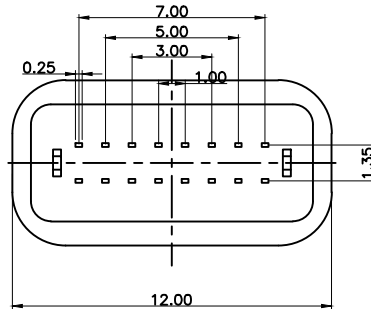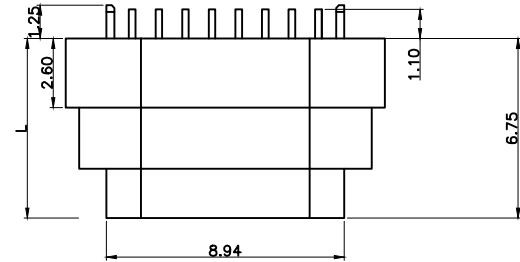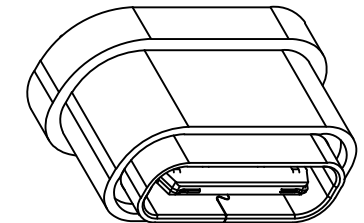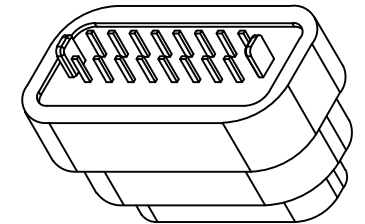

RECOMMENDED P.C.B LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm







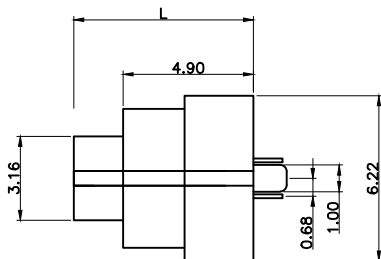


A1	GND	B12	GND
A2		B11	
A3		B10	
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10		B3	
A11		B2	
A12	GND	B1	GND

CUSTOMER DRAWING		
UNITS	SCALE	SHEET
mm	1:1	1 OF 3
PROJECTION:	DRAW:	
	DAP	
GENERAL TOLERANCE	CHECK:	
.000 ±0.02	HWT	
.00 ±0.10	APPD:	
.0 ±0.20	HHM	
.0 ±2°		
.00 ±1°		

铭创科技(东莞)有限公司		
Mingchuang Technology (Dongguan) Co., Ltd		
TITLE		
防水TYPE C母座16PIN 立式两脚插板DIP L=6.8 三模 带中夹片 IPX8		
MAT'L	SEE TABLE	FINISH SEE TABLE
DWG. NO.	A01W1605A	PART NO. _____ SIZE A4

L=6.80

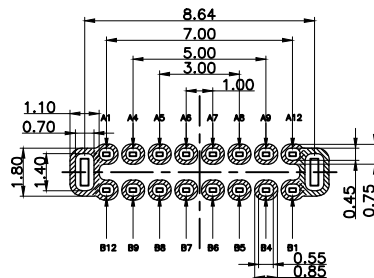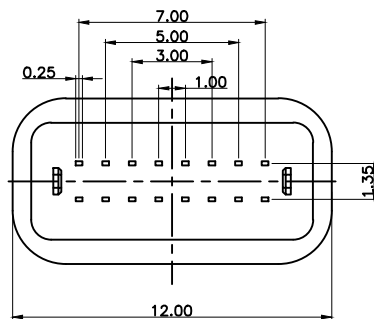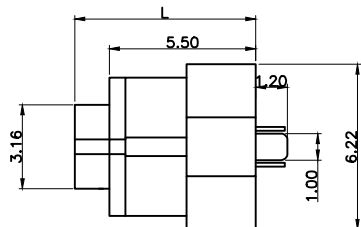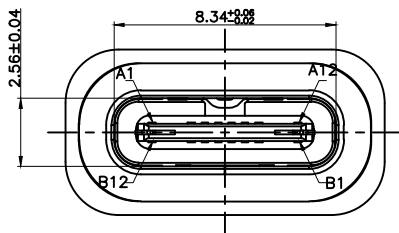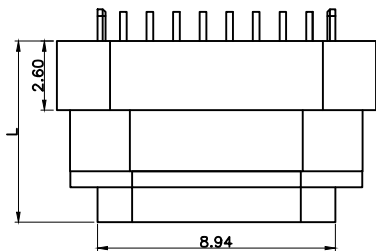

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

L=6.80

带防水圈

A1	GND	B12	GND
A2		B11	
A3		B10	
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10		B3	
A11		B2	
A12	GND	B1	GND

REV	DESCRIPTION	DATE	APPROVED
A	新板发行	2023.05.05	HHM

NOTE:

备注:

1.MATERIAL SPECIFICATION:

1.材料规格:

1-1.HOUSING:HIGH TEMPERATURE RESISTANT PLASTIC,UL94 V-0.

1-1.胶芯材料: 高温塑胶, 防火等级UL94 V-0

1-2.TERMINAL: COPPER ALLOY

1-2.端子材料: 铜合金

1-3.FRONT SHELL: STAINLESS STEEL

1-3.外壳材料: 不锈钢

1-4.MID PLATE: STAINLESS STEEL

1-4.中夹片: 不锈钢

2.PLATING SPECIFICATION:

2.电镀规格:

2-1.TERMINAL:

2-1.端子:

Ni 30u" MIN. UNDER PLATED OVER ALL.

镀镍底 30u" MIN.

Au PLATED Golden Flash OVER Ni

表面刷金 Golden Flash

2-2.FRONT SHELL:

2-2.外壳:

Ni 30u" MIN. PLATED OVER ALL.

镀镍底 30u" MIN.

3.MECHANICAL PERFORMANCE,

3.机械性能,

3-1.INSERTION FORCE: 0.5~2.0kgf.

3-1.插入力: 0.5~2.0kgf.

3-2.REMOVAL FORCE: 0.6kgf~2.0kgf.

3-2.拔出力: 0.6kgf~2.0kgf.

3-3.DURABILITY: 10000 CYCLES.

3-3.插拔寿命: 10000次.

4.ELECTRICAL PERFORMANCE,

4.电气性能,

4-1. VOLTAGE RATING: 48V DC/AC

4-1. 额定电压: 48V DC/AC

CURRENT RATING: 5A

额定电流: 5.0A

4-2. LLCR: 50mΩ/PIN MAX.

4-2. 接触阻抗: 50mΩ/PIN MAX.

4-3.INSULATION RESISTANCE: 100MΩ MIN

4-3. 绝缘阻抗: 100MΩ MIN

4-4.DIELECTRIC WITHSTAND VOLTAGE,AC 100V FOR 1 MINUTE.




4-4. 耐电压: AC 100V FOR 1 MINUTE.

5. ENVIRONMENTAL PERFORMANCE:

5. 环境特性:

OPERATING TEMPERATURE: -25°C~+85°C.


工作温度: -25°C~+85°C.








CUSTOMER DRAWING			铭创科技(东莞)有限公司		
UNITS		SCALE	Mingchuang Technology (Dongguan) Co., Ltd		
mm		1:1	TITLE		
PROJECTION:		SHEET	防水TYPE C母座16PIN 立式两脚插板DIP		
		2 OF 3	L=6.8 三模 带中夹片 IPX8		
GENERAL TOLERANCE		DRAW:	MAT'L		
		DAP	SEE TABLE		
		CHECK:	FINISH		
		HWT	SEE TABLE		
		APPD:	DWG. NO.		
		HHM	A01W1605A		
			PART NO.		
			SIZE		
			A4		



REV	DESCRIPTION	DATE	APPROVED
A	新板发行	2023. 05. 05	HHM

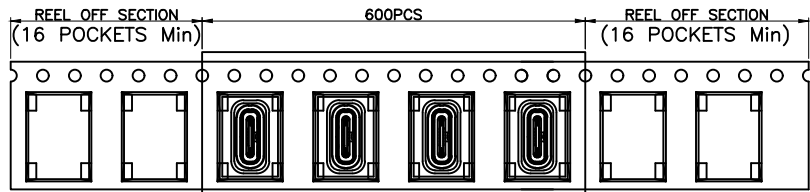

SEE DETAIL X

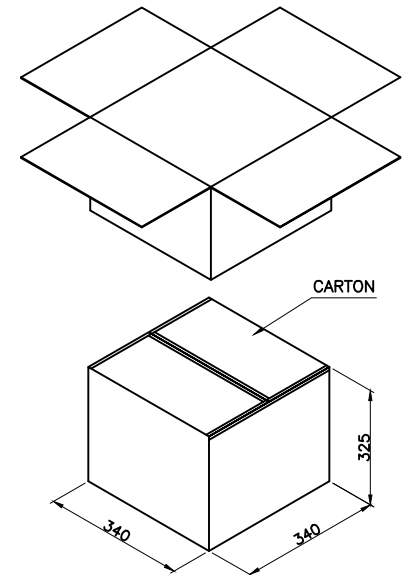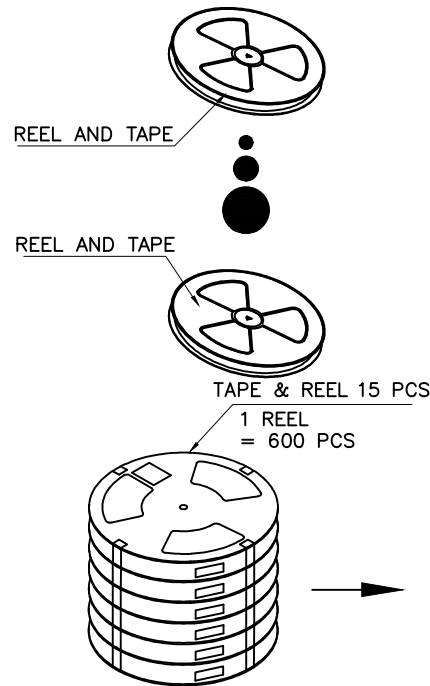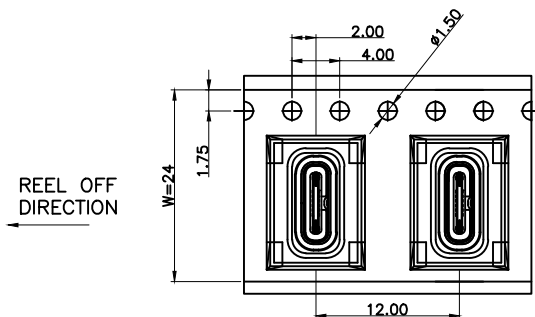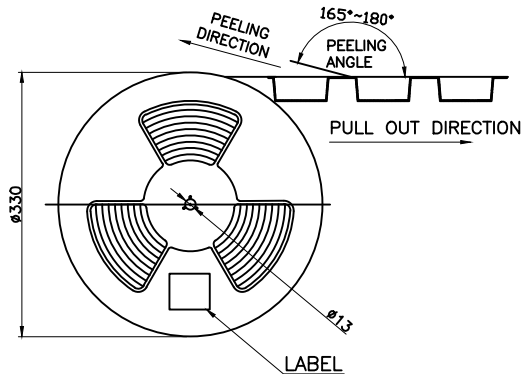

CUSTOMER DRAWING		
UNITS mm	SCALE 1:1	SHEET 3 OF 3
PROJECTION: 		DRAW: DAP
GENERAL TOLERANCE .000 ±0.02 .00 ±0.10 .0 ±0.20 .0 ±2° .00 ±1°		CHECK: HWT
		APPD: HHM

	REEL	CARTON
CONNECTOR (PCS)	600	6000
铭创科技（东莞）有限公司 Mingchuang Technology (Dongguan) Co., Ltd		
TITLE 防水TYPE C母座16PIN 立式两脚插板DIP L=6.8 三模 带中夹片 IPX8		
MAT'L SEE TABLE	FINISH SEE TABLE	
DWG. NO. A01W1605A	PART NO. _____	SIZE A4